



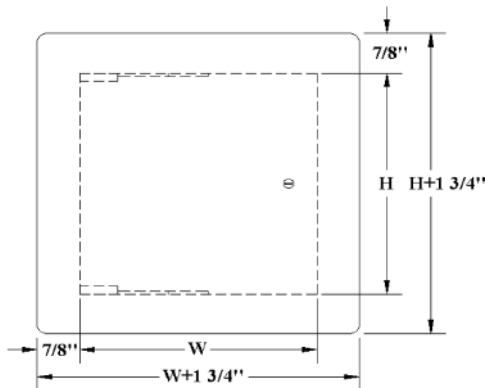

- Doors are ideally suited for new installation or for remodeling, in masonry, tile, wood or other wall surfaces. Door features rounded safety corners.
- Door and frame are fabricated from 16 gauge, galvanized steel with a prime coat finish.
- Frame is one piece construction, 1" wide and provides perfect concealment of the rough wall opening. Wall frame is provided with 1/4" mounting holes for fastening within the furred spaces, allowing faster installation and giving maximum clearance.
- Concealed Pivoting Rod Hinge prevents distortion and closes door squarely. Doors 24" or larger are provided with a continuous piano hinge.
- Latch is screwdriver operated.
- Finish is a prime coat suitable for painting.

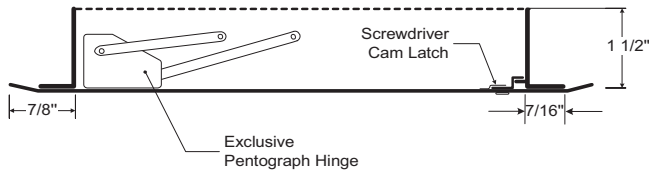

### MODEL NUMBER AND OPTIONS SELECTION

- -DW Dry Wall Access Door
- -CL Cylinder Lock (one per door)

### STANDARD AVAILABLE SIZES

NOMINAL DOOR SIZE (W x H)	WALL OPENING	NO. OF LATCHES	WT. PER DOOR (LBS)
DW 6" x 6"	6-1/2" x 6-1/2"	1	3
DW 8" x 8"	8-1/2" x 8-1/2"	1	3
DW 10" x 10"	10-1/2" x 10-1/2"	1	4
DW 12" x 12"	12-1/2" x 12-1/2"	1	5.5
DW 14" x 14"	14-1/2" x 14-1/2"	1	6
DW 16" x 16"	16-1/2" x 16-1/2"	1	7.5
DW 18" x 18"	18-1/2" x 18-1/2"	3	9
DW 24" x 24"	24-1/2" x 24-1/2"	3	15

NOTE: 1. Wall opening sizes are minimum required.  
2. Special sizes available upon request.

### NOTES:

1. Overall outside size
2. Concealed pivoting rod hinge
3. Wall frame
4. Screwdriver operated latch
5. 1/4" mounting holes

Dimensions are subject to manufacturer's tolerance of plus or minus 1/4" and change without notice.