


## L100-L300 DIMENSIONS


### CONSTRUCTION FEATURES

Housing constructed of galvanized steel with 1/2" thick acoustic insulation

- Forward curved, dynamically balanced, polymeric centrifugal wheel for quiet, efficient performance
- Integral plug-type disconnect
- Thermal protected, permanently lubricated, continuous duty direct drive motor mounted on vibration isolators
- Ceiling or wall installation
- 8 position mounting bracket
- Integral back draft damper

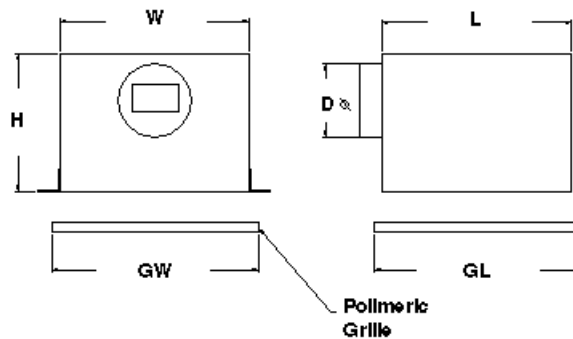

## L400-L500 DIMENSIONS

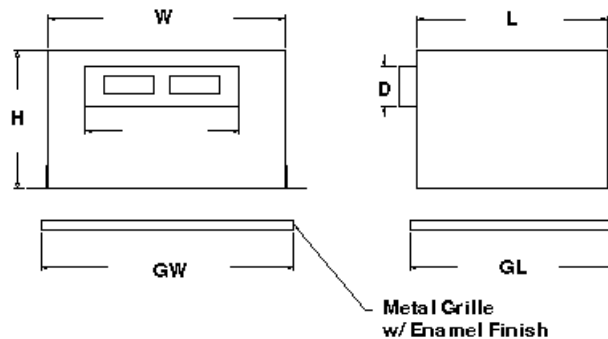

### Models

Model	Volt/Phase	FLA	CFM Range
L100	120/60/1	1.0	10-136
L150	120/60/1	1.2	30-181
L200	120/60/1	1.6	25-231
L250	120/60/1	2.0	75-272
L300	120/60/1	2.6	100-312
L400	120/60/1	1.3	25-480
L500	120/60/1	2.0	125-538
961L	Inline Kit for Model L100,150		
981L	Inline Kit for Model L200, 250, 300		
982L	Inline Kit for Model L400,500		
57W	Speed Control, White, for L100-500		

### Dimensions

Model	H	W	L	GW	GL	D
L100	11.75	12.25	12.25	14	14	6
L150	11.75	12.25	12.25	14	14	6
L200	11.75	12.25	12.25	14	14	8
L250	11.75	12.25	12.25	14	14	8
L300	11.75	12.25	12.25	14	14	8
L400	11.75	12.25	12.25	23.25	14	18.5 x 4.5
L500	11.75	12.25	12.25	23.25	14	18.5 x 4.5